

FIG. 1

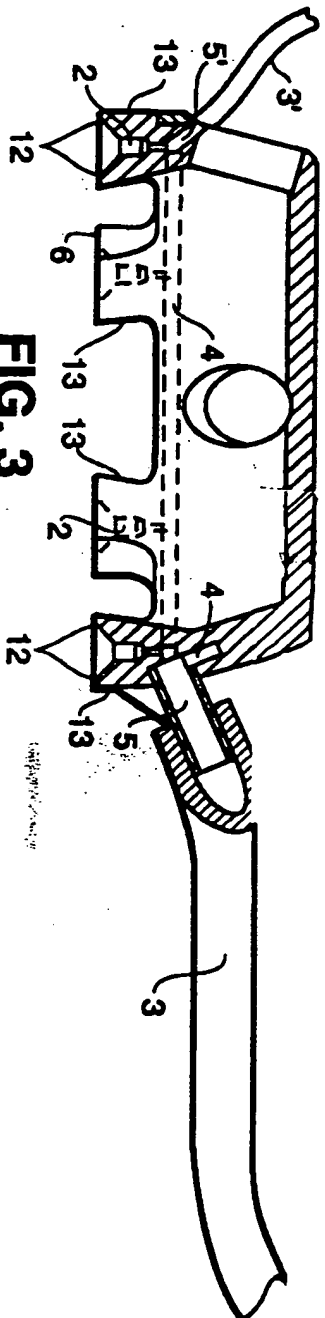


FIG. 3

FIG. 1 is a top-down view of a circular device. A central shaft, labeled 3, extends from the center of the device. The shaft has a flange, labeled 5, at its base. The device consists of a ring of components, labeled 1, which are arranged in a circular pattern around the shaft. The ring is divided into segments, labeled 2, 4, and 9. A dashed line, labeled 4, indicates a boundary or a path within the ring. A horizontal line, labeled A, passes through the center of the device, with arrows at both ends.

FIG. 3 is a cross-sectional view of the device. It shows a central shaft, labeled 3, passing through a series of components. The components are labeled 1, 2, 4, 5, 6, 9, 12, and 13. The shaft is shown in cross-section, with a central hole. The components are arranged in a series of layers or segments around the shaft. A dashed line, labeled 4, indicates a boundary or a path within the components. The shaft is shown entering and exiting the device through a central opening.



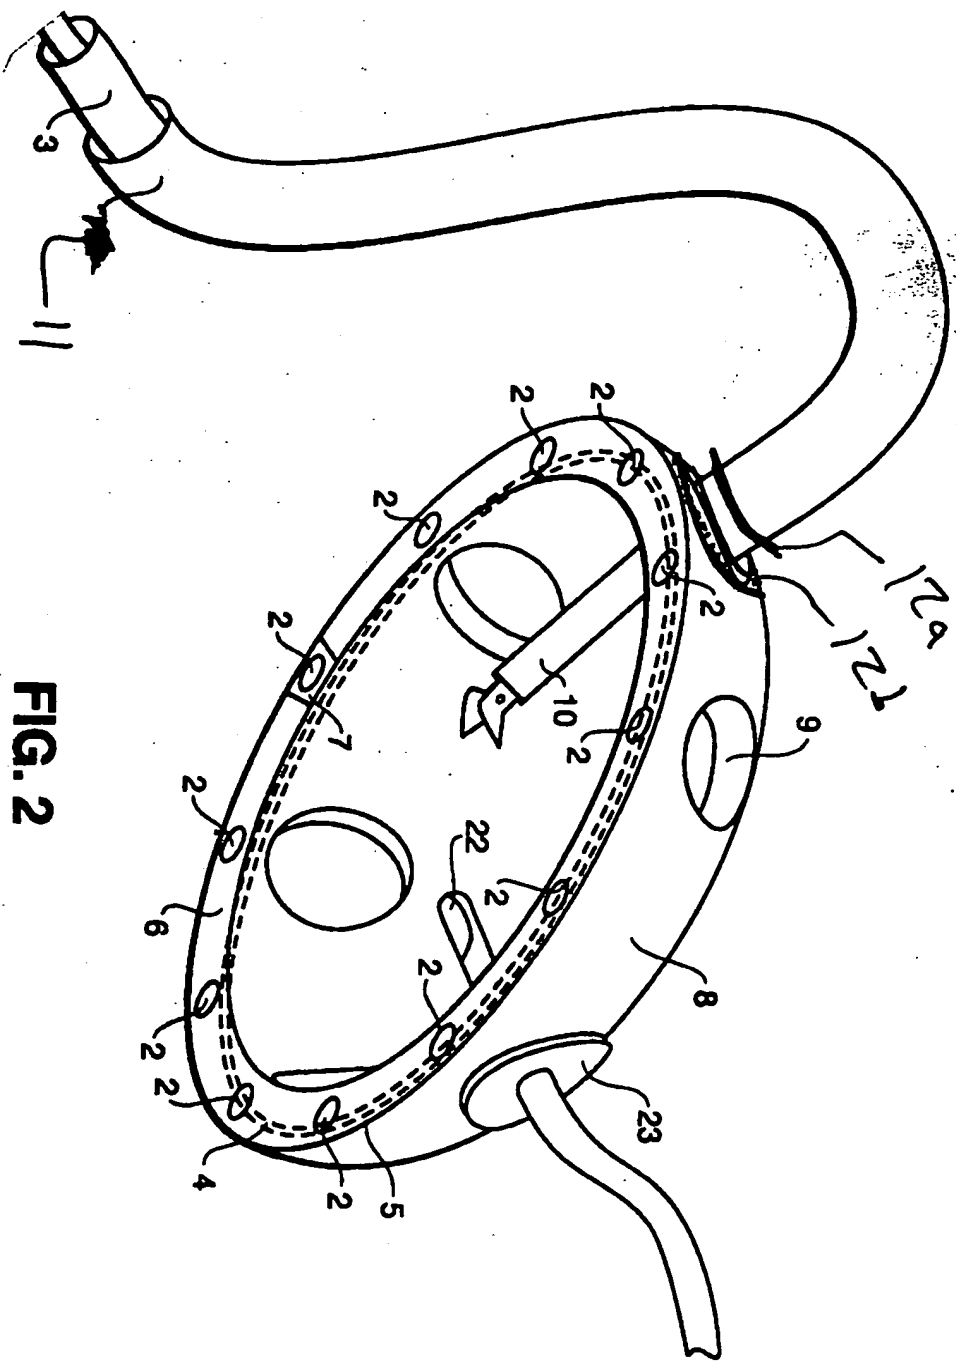


FIG. 2




FIG. 2 is a perspective view of the device of FIG. 1, showing the device in a retracted position. The device is shown in a retracted position, with the distal end of the tube (11) being pulled back towards the proximal end. The device is shown in a retracted position, with the distal end of the tube (11) being pulled back towards the proximal end.

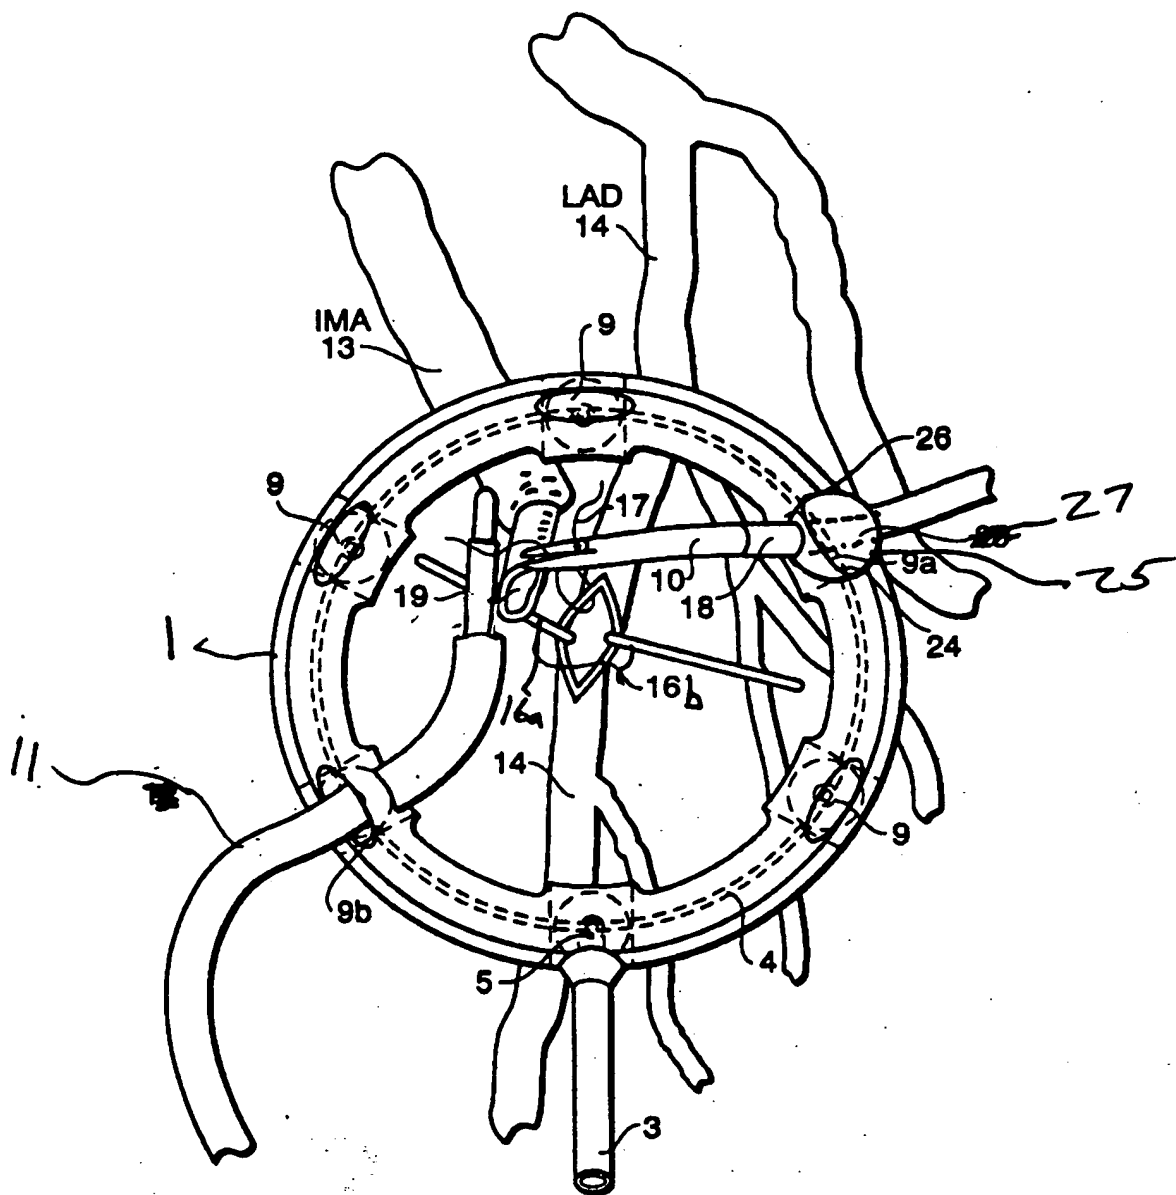


**FIG. 4**

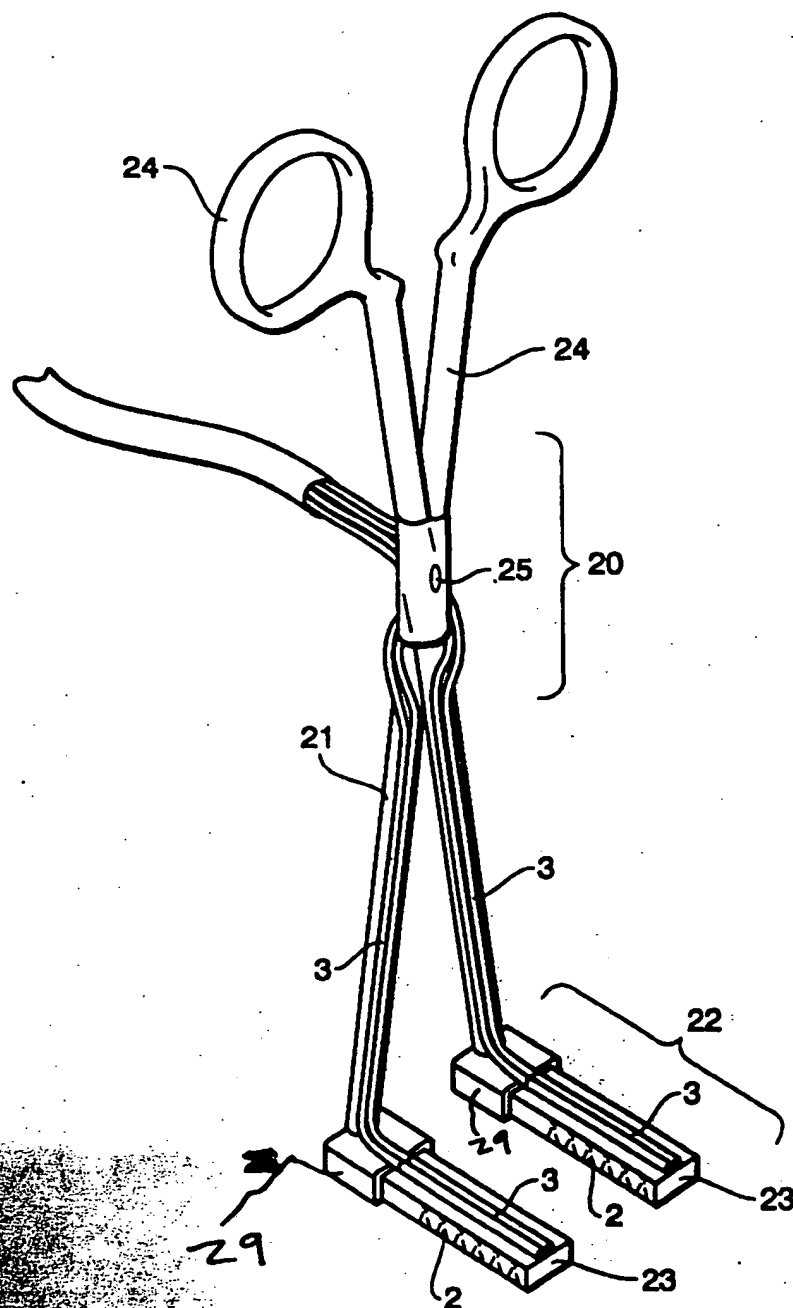

**FIG. 5**

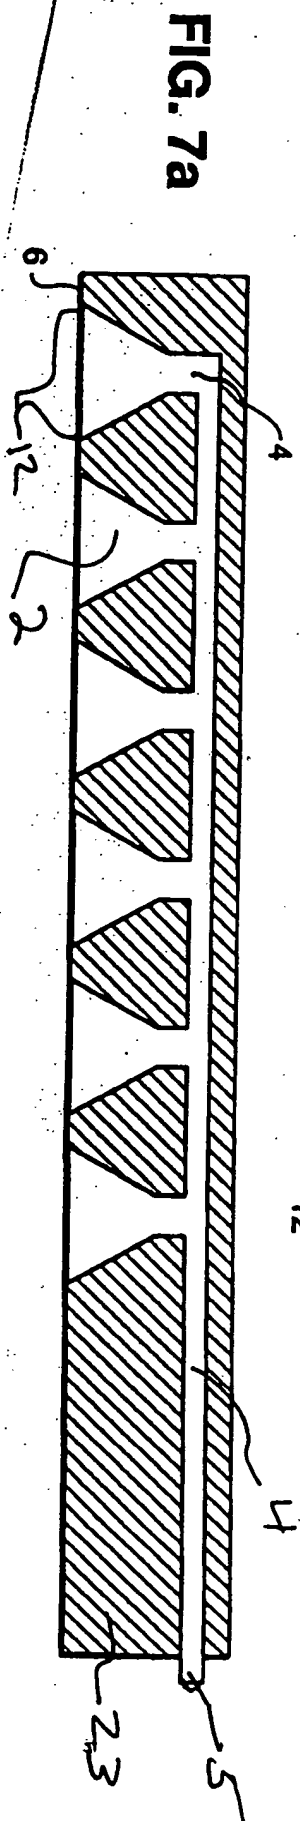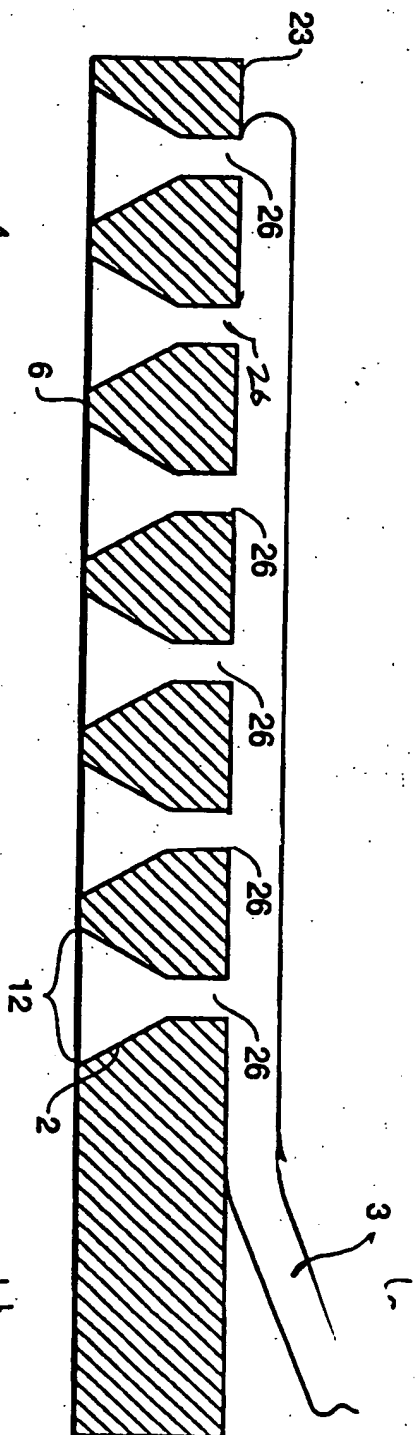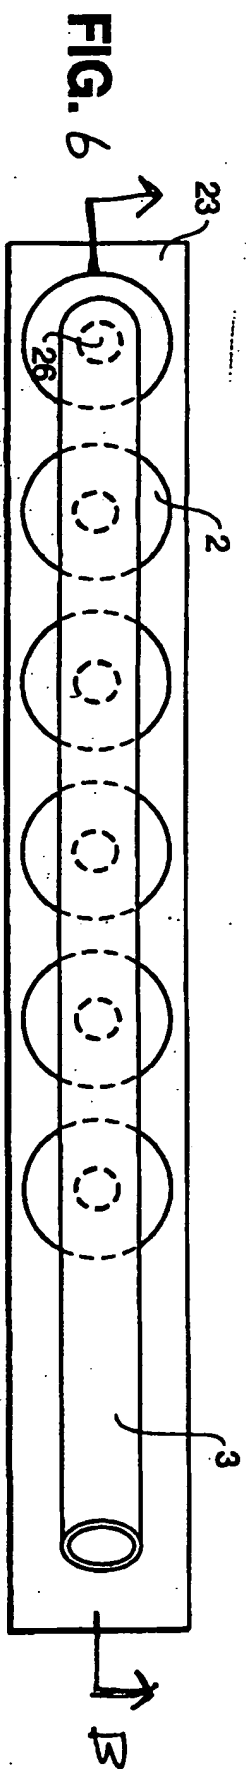

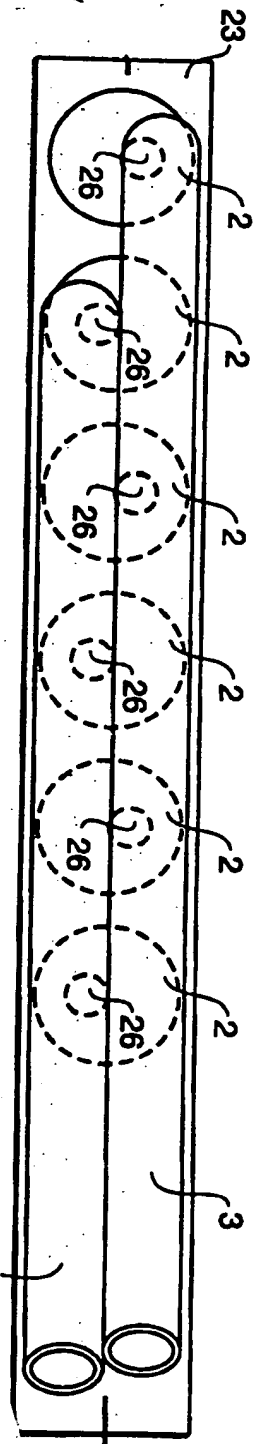

**FIG.**

Figure 9

VACUUM TUBES (1) AND (2)

VACUUM TUBES (3) AND (4)

VACUUM HOSE

20

21

22

23

24

25

26

27

28

29

30

31

.132

.130

.234

.250